



TYPE: ME.TRU-3 3VA
CORE SIZE: UI30/5,5

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV.
- Increased humidity resistance

Manufacturing standard EN 61558

- Safety insulation transformer
- Max.ambient temperature: $t_a 70^{\circ}\text{C}$
- Insulation class: $t_a 70^{\circ}\text{C}$ B 130 $^{\circ}\text{C}$
- Double insulated
- Degree of protection: IP00
- Not short-circuited

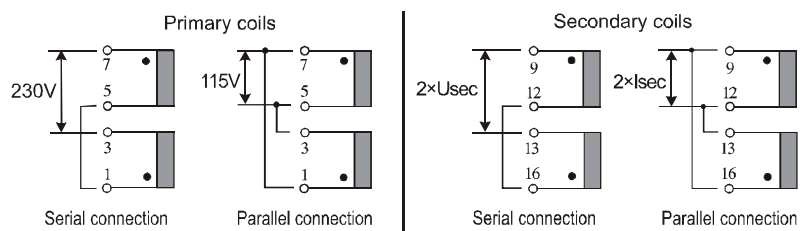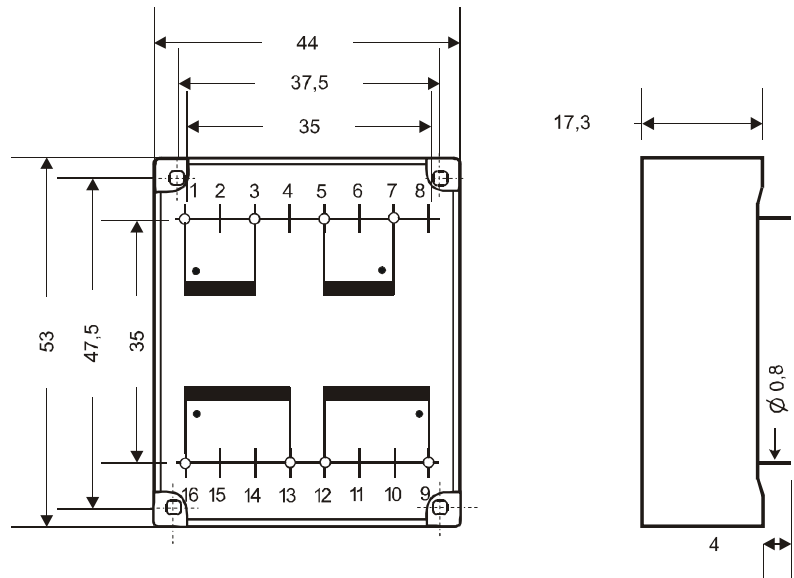

Application

- PCB mounting installation
- Low height design
- Possibility of serial and parallel connection of primary and secondary coils

Deviation of secondary voltages 5%

Modell numer	Primary voltage	Pin configuration	Secondary voltage	Pin configuration	Secondary fuse current
ME.TRU-3.30106-2	2x115 V	1-3 5-7	2x6 V	9-12 13-16	2x0,25 A 250mAT
ME.TRU-3.30175-2	2x115 V	1-3 5-7	2x7,5 V	9-12 13-16	2x0,20 A 200mAT
ME.TRU-3.30109-2	2x115 V	1-3 5-7	2x9 V	9-12 13-16	2x0,16 A 160mAT
ME.TRU-3.30112-2	2x115 V	1-3 5-7	2x12 V	9-12 13-16	2x0,12 A 125mAT
ME.TRU-3.301135-2	2x115 V	1-3 5-7	2x13,5 V	9-12 13-16	2x0,11 A 125mAT
ME.TRU-3.30115-2	2x115 V	1-3 5-7	2x15 V	9-12 13-16	2x0,10 A 100mAT
ME.TRU-3.30118-2 *	2x115 V	1-3 5-7	2x18 V	9-12 13-16	2x0,08 A 80mAT
ME.TRU-3.30124-2 *	2x115 V	1-3 5-7	2x24 V	9-12 13-16	2x0,06 A 63mAT

*Certified as insulation transformer