



TYPE: ME.TRU-4 4VA
CORE SIZE: UI30/7,5

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV.
- Increased humidity resistance

Manufacturing standard EN 61558

- Safety insulation transformer
- Max.ambient temperature: t_a 70°C
- Insulation class: t_a 70% B 130°C
- Double insulated
- Degree of protection: IP00
- Not short-circuited

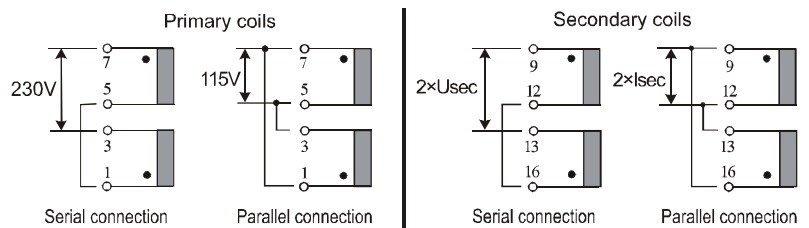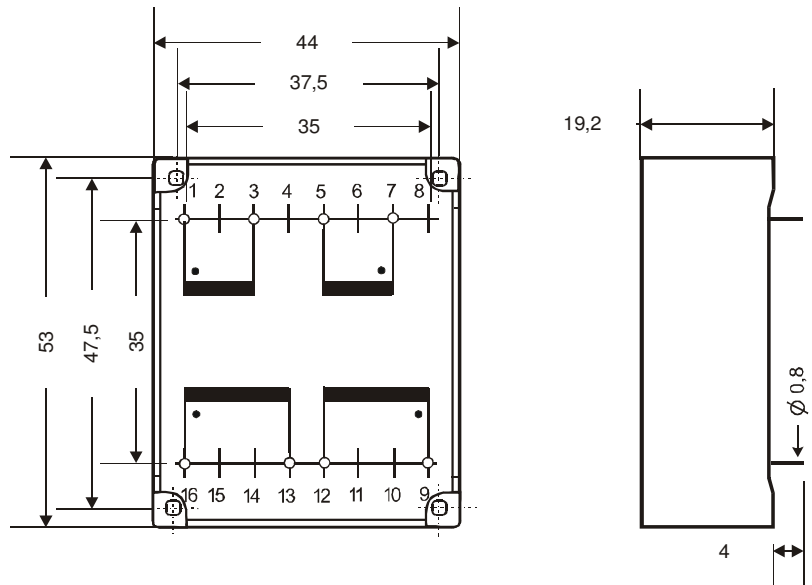

Application

- PCB mounting installation
- Low height design
- Possibility of serial and parallel connection of primary and secondary coils

Deviation of secondary voltages 5%
Prescribed primary circuit fuse 32mAT

Modell numer	Primary voltage	Pin configuration	Secondary voltage	Pin configuration	Secondary current
ME.TRU-4.30206-2	2×115 V	1-3 5-7	2×6 V	9-12 13-16	2×0,33 A
ME.TRU-4.30275-2	2×115 V	1-3 5-7	2×7,5 V	9-12 13-16	2×0,26 A
ME.TRU-4.30209-2	2×115 V	1-3 5-7	2×9 V	9-12 13-16	2×0,22 A
ME.TRU-4.30212-2	2×115 V	1-3 5-7	2×12 V	9-12 13-16	2×0,16 A
ME.TRU-4.302135-2	2×115 V	1-3 5-7	2×13,5 V	9-12 13-16	2×0,14 A
ME.TRU-4.30215-2	2×115 V	1-3 5-7	2×15 V	9-12 13-16	2×0,13 A
ME.TRU-4.30218-2	2×115 V	1-3 5-7	2×18 V	9-12 13-16	2×0,11 A
ME.TRU-4.30224-2 *	2×115 V	1-3 5-7	2×24 V	9-12 13-16	2×0,08 A

*Certified as insulation transformer