



TYPE: ME.TRU-14 14VA
CORE SIZE: UI30/26

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV.
- Increased humidity resistance

Manufacturing standard EN 61558

- Safety insulation transformer
- Max.ambient temperature: t_a 70°C
- Insulation class: t_a 70% B 130°C
- Double insulated
- Degree of protection: IP00
- Not short-circuited

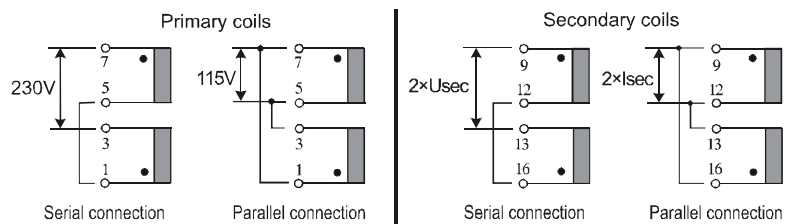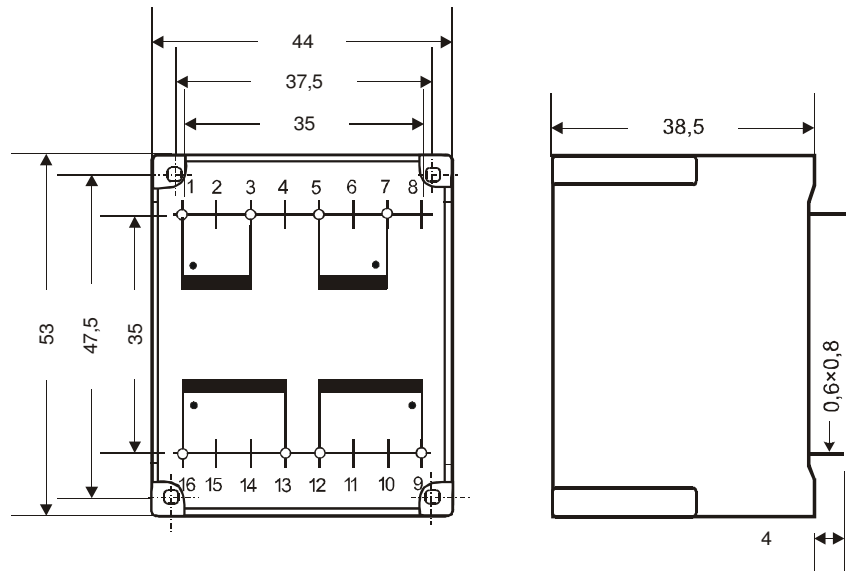

Application

- PCB mounting installation
- Low height design
- Possibility of serial and parallel connection of primary and secondary coils

Deviation of secondary voltages 5%
Prescribed primary circuit fuse 100mAT

Modell numer	Primary voltage	Pin configuration	Secondary voltage	Pin configuratuion	Secondary current
ME.TRU-14.30506-2	2x115 V	1-3 5-7	2x6 V	9-12 13-16	2x1,16 A
ME.TRU-14.30575-2	2x115 V	1-3 5-7	2x7,5 V	9-12 13-16	2x0,93 A
ME.TRU-14.30509-2	2x115 V	1-3 5-7	2x9 V	9-12 13-16	2x0,77 A
ME.TRU-14.30512-2	2x115 V	1-3 5-7	2x12 V	9-12 13-16	2x0,58 A
ME.TRU-14.305135-2	2x115 V	1-3 5-7	2x13,5 V	9-12 13-16	2x0,51 A
ME.TRU-14.30515-2	2x115 V	1-3 5-7	2x15 V	9-12 13-16	2x0,46 A
ME.TRU-14.30518-2	2x115 V	1-3 5-7	2x18 V	9-12 13-16	2x0,38 A
ME.TRU-14.30524-2 *	2x115 V	1-3 5-7	2x24 V	9-12 13-16	2x0,29 A

*Certified as insulation transformer