


POWER: 75VA

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV-1p
- Increased humidity resistance

Manufacturing standard: EN 61558

- Safety insulation transformer
- Max. ambient temperature: t_a 50°C
- Insulation class: B 130°C
- Degree of protection: IP00
- Non-inherently short-circuit proof

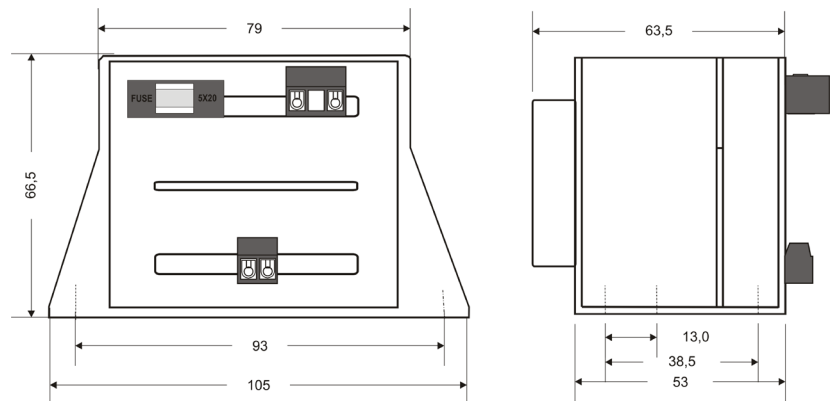

- The mains voltage may be 10% higher or lower than the nominal one so the power of the transformer has to be chosen accordingly.
- The tests of transformers according to the standard EN61558-1 chapter 27.2 were not carried out because the final design of the cover can affect the result. The chapter 27.2 does not concern to the IP00 protection.
- The threshold temperature at abnormal operating conditions is the temperature which has to be taken into consideration if the transformer is built in a device.

Non-inherently short-circuit proof transformer in case of insulation class "B": 225 °C

Application

- For power supply of safeguarding centres
- For power supply of other electrical devices

Usage features

- Mechanical fixing possibility for direct
- Built-in primary fuse
- Connection with terminal block connectors
- Cross section of cables max. 1.5 mm²

Model number	Primary voltage	Secondary voltage	Secondary current
ME.TRE-75.75312/BSS 75VA	230V-50Hz	12 V	6,25 A
ME.TRE-75.75316/BSS 75VA	230V-50Hz	16.5 V	4,54 A
ME.TRE-75.75318/BSS 75VA	230V-50Hz	18 V	4,16 A
ME.TRE-75.75324/BSS 75VA	230V-50Hz	24 V	3,12 A
ME.TRE-75.75340/BSS 75VA	230V-50Hz	40 V	1,87 A
Prescribed primary circuit fuse: 500 mA			
Tolerance of secondary voltage: 5%			

